



Feature


- Meets IEEE802.3an&ANSI X 3.263 Standards
- RoHS/Reach/HF Compliant
- 10G Base-T Through-Hole Type
- Operating Temperature Range: -40°C to +85°C



Electrical Specifications@25°C											
Part Number	OCL(uH Min) @100KHz/V	L.L (uH Max)	Cw/w (pF Max)	DCR (Ω Max)	HI-POT (Vrms)	T/R (±5%)					
						TX	RX				
FK96201T-2	120	0.5	28	1.2	1500	1CT:1CT	1CT:1CT				
Continue											
Part Number	Insertion Loss (dB Max)			Return Loss(dB Min)				Cross talk (dB Min)		DCMR (dB Min)	
	1-300 MHZ	400 MHZ	500 MHZ	1-100 MHZ	200-300 MHZ	400 MHZ	500 MHZ	1-100 MHZ	100-500 MHZ	1-250 MHZ	250-500 MHZ
FK96201T-2	-1.0	-1.5	-2.0	-18	-12	-11	-10	-40	-30	-30	-22

MECHANICAL

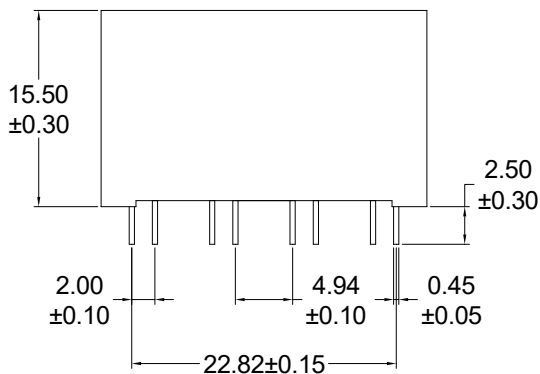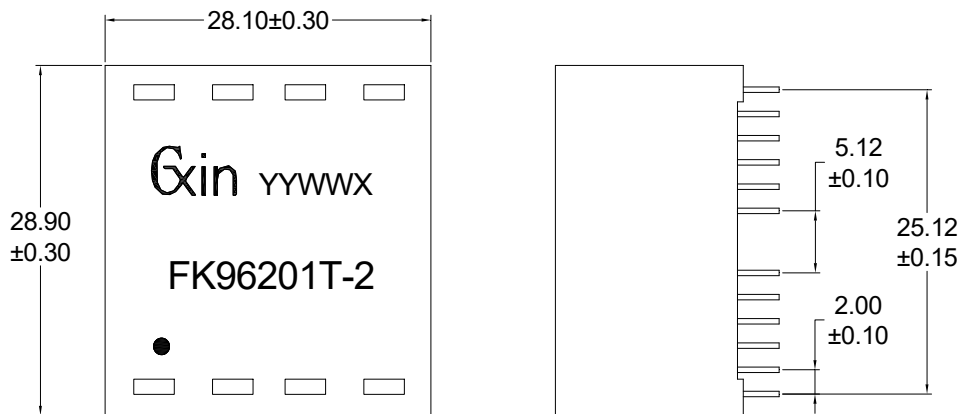

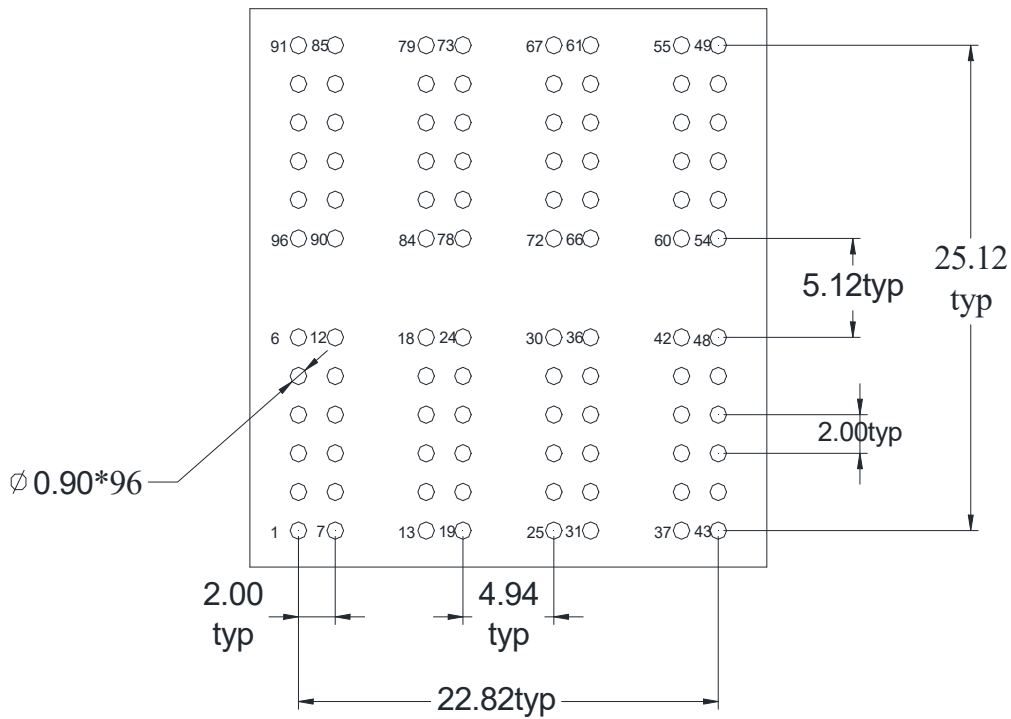

SCHEMATICS

