




Feature


- Meets IEEE802.3bz&ANSI X 3.263 Standards
- RoHS/Reach/HF Compliant
- 2.5G/5G Base-T Through-Hole Type
- Operating Temperature Range: 0°C to +70°C



Electrical Specifications@25°C										
Part Number	OCL(uH Min) @100KHz/V	L.L (uH Max)	Cw/w (pF Max)	DCR (Ω Max)	HI-POT (Vrms)	T/R (±5%)				
						TX	RX			
FE96201T	180	0.5	28	1.2	1500	1CT:1CT	1CT:1CT			
Continue										
Part Number	Insertion Loss (dB Max)			Return Loss(dB Min)				Cross talk (dB Min)	DCMR (dB Min)	
	1-125 MHZ	125-200 MHZ	200-250 MHZ	1-30 MHZ	30-100 MHZ	100-200 MHZ	200-250 MHZ	1-250 MHZ	1-100 MHZ	100-250 MHZ
FE96201T	-1.0	-2.0	-2.5	-18	-14	-11	-9	-25	-30	-20

MECHANICAL

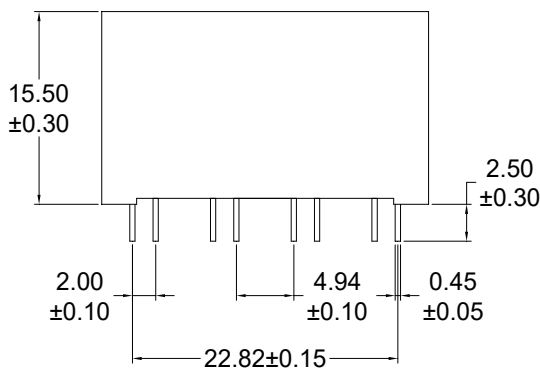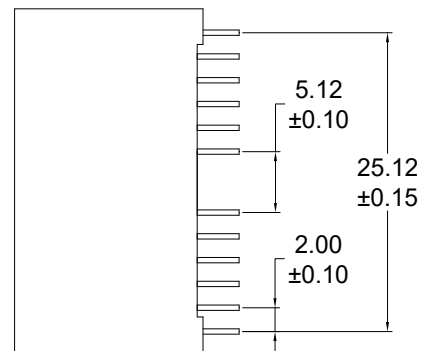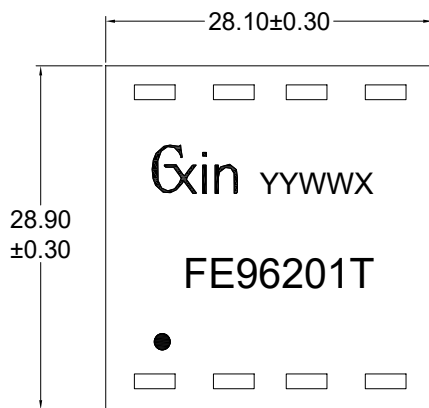

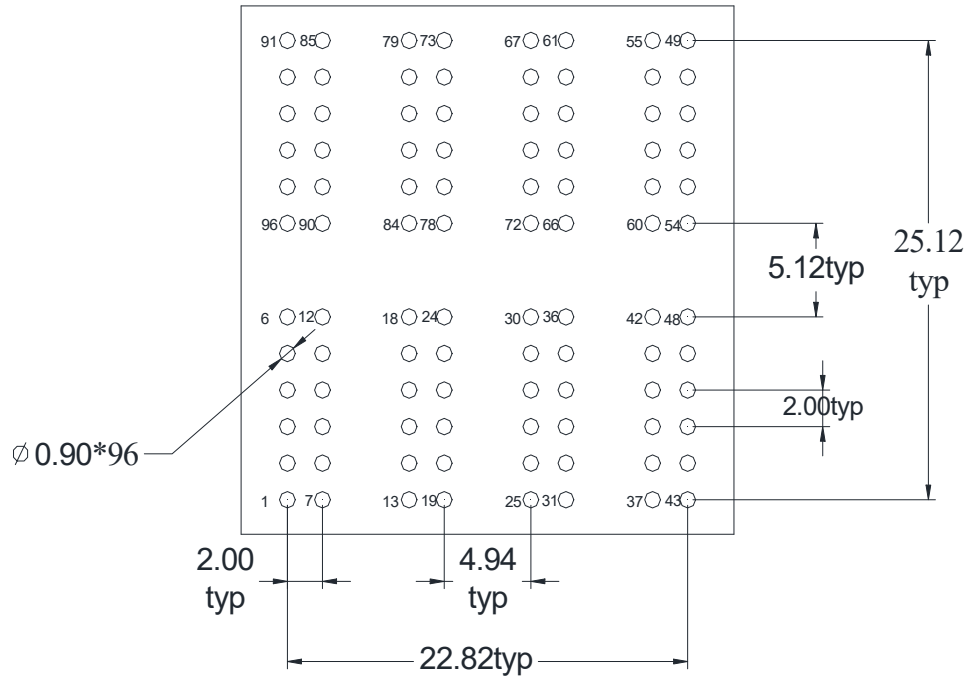

SCHEMATICS

