

**Feature**


- Meets IEEE802.3ab&ANSI X 3.263 Standards
- RoHS Compliant
- 10/100 Base-T Through-Hole Type
- Operating Temperature Range: 0°C to +70°C




Electrical Specifications@25°C

Part Number	OCL(uH Min) @100KHz/V with 8mA DC Bias	L.L (uH Max)	Cw/w (pF Max)	DCR (Ω Max)	HI-POT (Vrms)	T/R (±3%)	
						TX	RX
FB20104N	350	0.5	56	1.2	1500	1CT:1CT	1CT:1CT
Continue							
Part Number	Insertion Loss(dBMax)	Return Loss(dB Min)			Cross talk (dB Min)	DCMR (dBMin)	
		1-100MHz	0.5-30MHz	30-60MHz			60-100MHz
FB20104N	-1.0	-18	-14	-12	-30	-30	

**MECHANICAL**

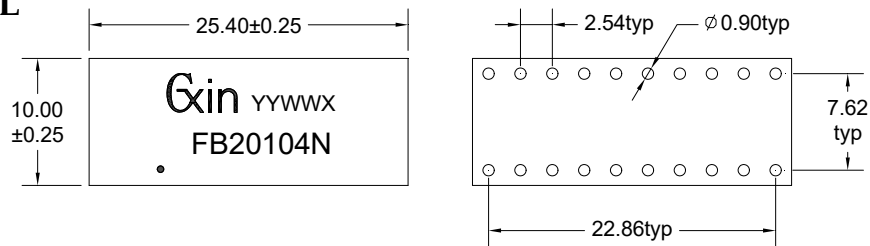

**Suggested PAD Layout**

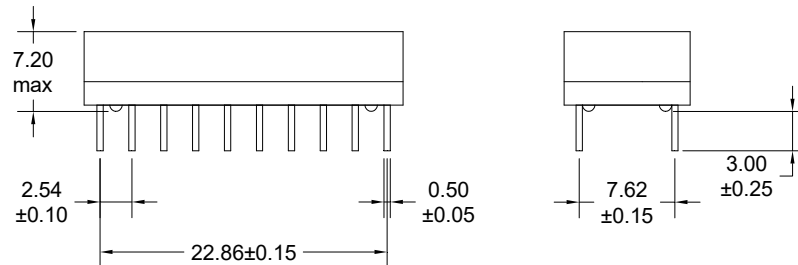

**SCHEMATICS**

