


## Feature

- Meets IEEE802.3at&ANSI X 3.263 Standards
- RoHS Compliant
- 10/100 Base-T Through-Hole Type
- Suitable for PoE+ applications(720mA Max@57V continuous)
- Operating Temperature Range: -40°C to +85°C



Electrical Specifications@25°C								
Part Number	OCL(uH Min) @100KHz/V with 8mA DC Bias	L.L (uH Max)	Cw/w (pF Max)	DCR (Ω Max)	HI-POT (Vrms)	T/R(±5%)		
						TX	RX	
HB1604C-5	350	0.5	25	1.2	1500	1CT:1CT	1CT:1CT	
Continue								
Part Number	Insertion Loss (dB Max)	Return Loss(dB Min)			Cross talk (dB Min)	DCMR (dB Min)		
		0.3-100MHz	0.5-30MHz	60MHz			60-100MHz	0.3-100MHz
HB1604C-5	-1.1	-18	-13	-11	-35	-30		

## MECHANICAL

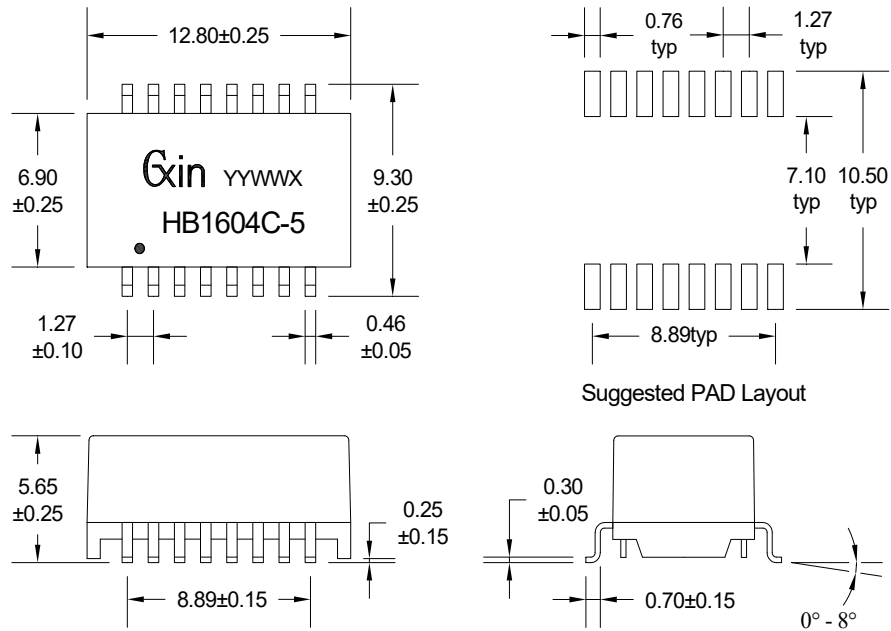

## SCHEMATICS

