


Feature



- Meets IEEE802.3af & ANSI X 3.263 Standards
- RoHS Compliant
- Stitable for POE applications(350mA@57V continouos)
- 10/100/1000 Base-T Surface Monut Type Open Header
- Operating Temperature Range: 0°C to +70°C

Electrical Specifications@25°C								
Part Number	OCL(uH Min) @100KHz/V with 8mA DC Bise	L.L (uH Max)	Cw/w (pF Max)	DCR (Ω Max)	HI-POT (Vrms)	T/R (±5%)		
						TX	RX	
HG4801P-1	350	0.5	25	1.2	1500	1CT:1CT	1CT:1CT	
Continue								
Part Number	Insertion Loss (dBMax)	Return Loss(dBMin)			Cross talk (dB Min)	DCMR (dB Min)		
		0.3-100MHZ	0.5-30MHZ	60MHZ			60-100MHZ	0.3-100MHZ
HG4801P-1	-1.1	-18	-13	-11	-35	-30		

MECHANICAL

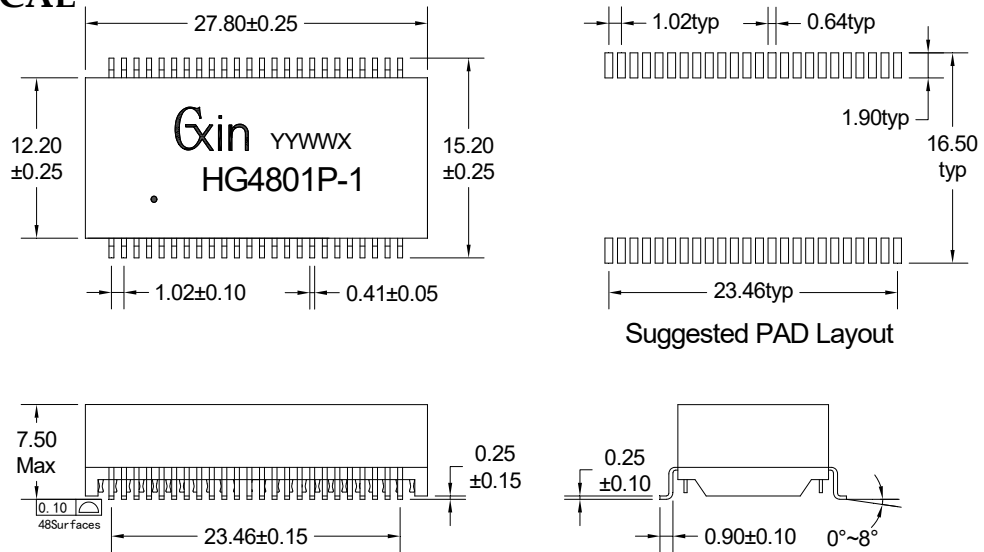

SCHEMATICS

