


## Feature

- Meets IEEE802.3at&ANSI X 3.263 Standards
- RoHS Compliant
- Stitable for POE+ applications(720mA@57V continouos)
- 10/100 Base-T Through-Hole Type
- Operating Temperature Range: 0°C to +70°C



Electrical Specifications@25°C							
Part Number	OCL(uH Min) @100KHz/V with 8mA DC Bise	L.L (uH Max)	Cw/w (pF Max)	DCR (Ω Max)	HI-POT (Vrms)	T/R(±5%)	
						TX	RX
HB1602C-4	350	0.5	25	1.2	1500	1CT:1CT	1CT:1CT
Continue							
Part Number	Insertion Loss (dB Max)	Return Loss(dB Min)			Cross talk (dB Min)	DCMR (dB Min)	CMRR (dB Min)
		0.3-100MHz	0.5-30MHz	60MHz			
HB1602C-4	-1.1	-18	-13	-11	-35	-30	-40

## MECHANICAL

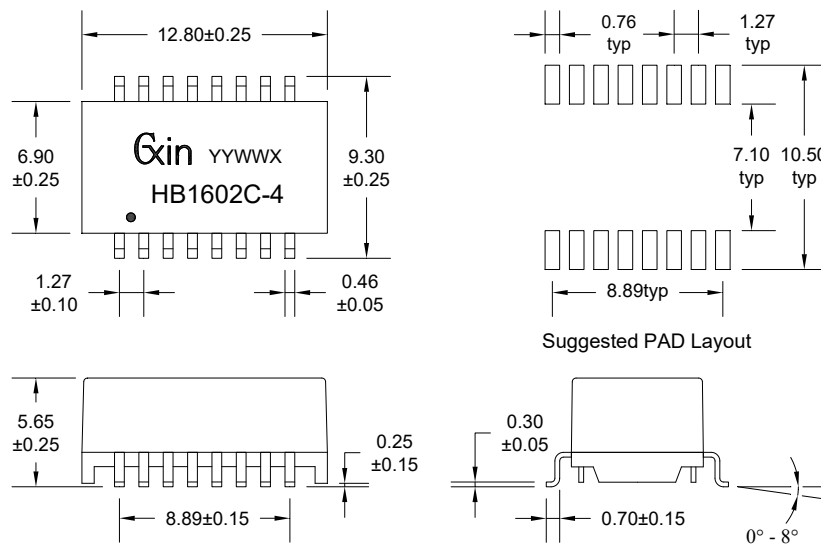

## SCHEMATICS

